
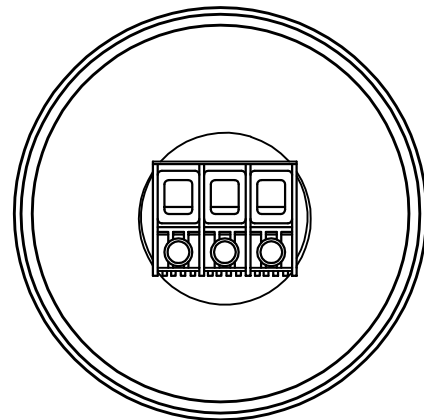


Technical specification:

- 1.Capacitance tolerance: -5%~+10%.
- 2.Rated Frequency: 50Hz;
- 3.Dissipation factor: $\text{tg } \delta \leq 0.001$ (at $U_n/50\text{Hz}$);
- 4.Between terminals to terminals: $2.15U_n/5s$;
- 5 .Between terminals to case: $3600\text{VAC}/2s$;
- 6.Over-voltage permission: $\leq 1.1U_n$;
- 7.Over-current permission: $\leq 1.3I_n$;
- 8.Type :J;
- 9.Casing: Aluminum can;
- 10.Discharge:Less than 75VDC after disconnection within 3 minutes;
- 11.Life expectancy: $\geq 100000\text{h}$;
- 12.Ambient temperature:-40/D;
- 13.Safety features:Safety internal pressure interrupter;self-healing;
- 14.Impregnation:Resin+Quartz sand;
- 15.Altitude: ≤ 2000 meters;
- 16.16.Reference Standard: IEC831-1.2-2014 UL810-2008;

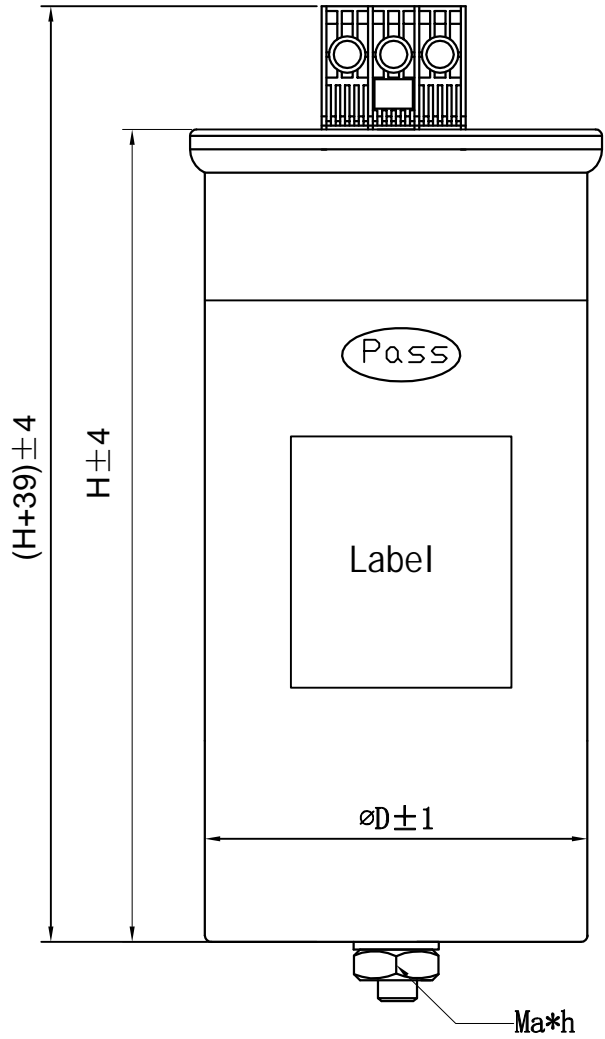

| | | | | |
|----------|------|------|-------|---------|
| 440-28-3 | 116 | 285 | 16*25 | 3*153.5 |
| 480-30-3 | 116 | 240 | 16*25 | 3*138.2 |
| Type | D/mm | H/mm | Ma*h | Cn*μF |

| | | | | | | | | | | |
|----------|--------|-----------|----------|-----------|------|---------------|--------|-------|-----|--|
| | | | | | | CAPACITOR | | | | |
| | | | | | | | | | | |
| Symbol | Amount | Zone | Doc. NO | Signature | Date | | | | | |
| Design | | 2022-12-5 | Standard | | | Design Phases | Weight | Scale | | |
| Drawing | | | | | | | | | | |
| Auditing | | | | | | | | | Ver | |
| Technics | | | Approved | | | Top Page | Page | | A | |